

ORDERING FORM

FIXTURE: PL BRADY FLAT PANEL

EXAMPLE: PL-40W-5200L-24-4K-SK24 (Use for Standard or Premium Panels)
PLE-40W-4400L-22-4K-HK22 (Use for Emergency Standard or Emergency Premium)

CODE	WATTS & LUMENS	SIZE	KELVIN	ACCESSORIES		
PL Standard or Premium PLE Emergency	<u>STANDARD 110</u> 36W-3960L 40W-4400L 45W-4950L 50W-5500L 60W-6600L <u>PREMIUM 130</u> 25W-3250L 32W-4160L 35W-4550L 40W-5200L 50W-6500L 60W-7800L	<u>STANDARD 110</u> 14-1 x 4 (40W,45W) 22-2 x 2 (36W,40W,45W) 24-2 x 4 (50W,60W) <u>PREMIUM 130</u> 14-1 x 4 (25W,40W) 22-2 x 2 (25W, 35W,40W) 24-2 x 4 (32W, 40W, 50W, 60W)	3K- 3000K 35K- 3500K 4K- 4000K 5K- 5000K	<u>SURFACE KITS</u> SK14-1x4 KIT SK22-2x2 KIT SK24-2x4 KIT	<u>FLANGE KITS</u> FLK14-1x4 KIT FLK22-2x2 KIT FLK24-2x4 KIT	<u>HANGING KITS</u> HK14-1x4 KIT (3 pcs per kit) HK22-2x2 KIT (2 pcs per kit) HK24-2x4 KIT (3 pcs per kit)


ACCESSORIES		
 <p>SK-Surface Kits</p>	 <p>FK-Flange Kits</p>	 <p>HK-Hanging Kits</p>



Parker Standard, Premium & Emergency LED Panel Brady Series

FEATURES

- Emergency Battery:** Integrated Driver Box with Built-In Lithium Battery, < 24 Hours Charging Time
- Driver:** PF≥0.95, THD<15%, Non-Flicker
- Dimming:** 0 - 10V **Beam Angle:** 120°
- Lumens:** 110 and 130 lm/W
- LED Chips:** Epistar, CRI>80, LM80
- Color Temperature:** 3000K, 3500K, 4000K, 5000K
- Material:** White Aluminum and High Quality LGP
- Included:** Earthquake-Proof Hook
- Certification:** UL, FCC, CE, RoHS
- Warranty:** 5 Years **DLC Availability:** Standard

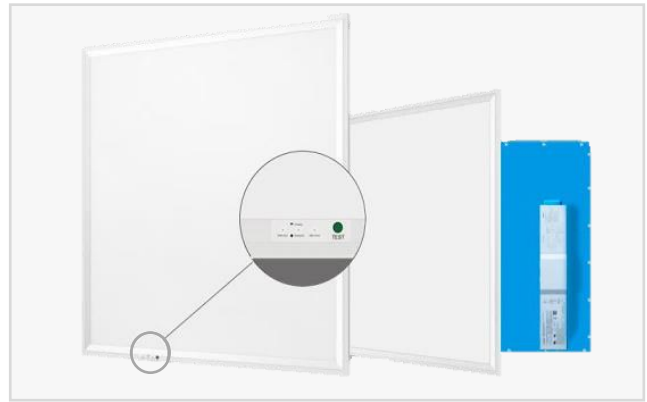

ITEM NUMBER		WATT (W)	LUMEN lm/W	LUMENS	DIMENSIONS	
Standard or Premium	Emergency					
PL-36W-22-TG-02	PLE-36W-22-TG-02	36W	STANDARD 110 LM/W	3960	2' x 2'	
PL-40W-14-TG-02	PLE-40W-14-TG-02	40W		4400	1' x 4'	
PL-40W-22-TG-02	PLE-40W-22-TG-02	40W		4400	2' x 2'	
PL-45W-14-TG-01	PLE-45W-14-TG-01	45W		EMERGENCY RUN TIME ≥ 120 MINS	4950	1' x 4'
PL-45W-22-TG-02	PLE-45W-22-TG-02	45W			4950	2' x 2'
PL-50W-24-TG-05	PLE-50W-24-TG-05	50W			5500	2' x 4'
PL-60W-24-TG-05	PLE-60W-24-TG-05	60W			6600	2' x 4'
PL-25W-14-TG-01	PLE-25W-14-TG-01	25W	PREMIUM 130 LM/W	3250	1' x 4'	
PL-25W-22-TG-01	PLE-25W-22-TG-01	25W		3250	2' x 2'	
PL-32W-24-TG-01	PLE-32W-24-TG-01	32W		4160	2' x 4'	
PL-35W-22-TG-01	PLE-35W-22-TG-01	35W		4550	2' x 2'	
PL-40W-14-TG-01	PLE-40W-14-TG-01	40W		EMERGENCY RUN TIME ≥ 120 MINS	5200	1' x 4'
PL-40W-22-TG-01	PLE-40W-22-TG-01	40W			5200	2' x 2'
PL-40W-24-TG-01	PLE-40W-24-TG-01	40W			5200	2' x 4'
PL-50W-24-TG-01	PLE-50W-24-TG-01	50W			6500	2' x 4'
PL-60W-24-TG-01	PLE-60W-24-TG-01	60W			7800	2' x 4'